


6E $\Phi 6.35 \times 32$ RoHS Compliant



玻璃保险丝管(延时型) Glass Tube Fuse (Time-Lag) 250V/125V

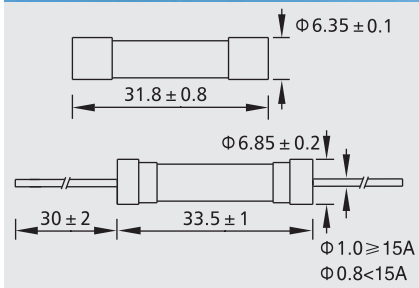

测试标准:
Testing Standard:
UL248-1 UL248-14

额定分断能力:
Interrupting Rating:
10000 Amperes at 125V AC(100mA~10A)
35 Amperes at 250V AC(100mA~1A)
100 Amperes at 250V AC(1.25A~3.5A)
200 Amperes at 250V AC(4A~10A)
150 Amperes at 125V/250V AC(12A~30A)

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

电气特性: Electrical Characteristics

| 额定电流的% % of Ampere Rating | 熔断时间 Opening Time |
|---------------------------|--------------------|
| 100% | 4 hours Min(大于4小时) |
| 135% | 1 hour Max(小于1小时) |
| 200% | 120 s Max(小于120秒) |
| 1000% | 10 ms Min(大于10毫秒) |

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

| 目录编号 Catalog No. | 额定电流 Ampere Rating | 额定电压 Voltage Rating | 熔化热能 ² Melting Integral (A ² .S) | 认证 Approvals | | |
|---------------------|-----------------------|------------------------|---|--------------|---|---|
| | | | | | | |
| 6E0100A/B | 100mA | 250/125V | 0.028 | ● | ● | |
| 6E0160A/B | 160mA | 250/125V | 0.075 | ● | ● | |
| 6E0200A/B | 200mA | 250/125V | 0.12 | ● | ● | |
| 6E0250A/B | 250mA | 250/125V | 0.15 | ● | ● | |
| 6E0315A/B | 315mA | 250/125V | 0.22 | ● | ● | |
| 6E0400A/B | 400mA | 250/125V | 0.28 | ● | ● | |
| 6E0500A/B | 500mA | 250/125V | 0.52 | ● | ● | |
| 6E0630A/B | 630mA | 250/125V | 0.87 | ● | ● | |
| 6E0800A/B | 800mA | 250/125V | 1.4 | ● | ● | |
| 6E1100A/B | 1A | 250/125V | 3.5 | ● | ● | |
| 6E1125A/B | 1.25A | 250/125V | 7.6 | ● | ● | |
| 6E1150A/B | 1.5A | 250/125V | 9.1 | ● | ● | |
| 6E1160A/B | 1.6A | 250/125V | 13 | ● | ● | |
| 6E1200A/B | 2A | 250/125V | 20 | ● | ● | |
| 6E1250A/B | 2.5A | 250/125V | 39 | ● | ● | |
| 6E1300A/B | 3A | 250/125V | 61 | ● | ● | |
| 6E1315A/B | 3.15A | 250/125V | 56 | ● | ● | |
| 6E1350A/B | 3.5A | 250/125V | 70 | ● | ● | |
| 6E1400A/B | 4A | 250/125V | 104 | ● | ● | |
| 6E1500A/B | 5A | 250/125V | 148 | ● | ● | |
| 6E1600A/B | 6A | 250/125V | 173 | ● | ● | |
| 6E1630A/B | 6.3A | 250/125V | 192 | ● | ● | |
| 6E1800A/B | 8A | 250/125V | 380 | ● | ● | |
| 6E2100A/B | 10A | 250/125V | 580 | ● | ● | |
| 6E2120A/B | 12A | 250/125V | 750 | | | ● |
| 6E2150A/B | 15A | 250/125V | 910 | | | ● |
| 6E2200A/B | 20A | 250/125V | 1250 | | | ● |
| 6E2250A/B | 25A | 250/125V | 1510 | | | ● |
| 6E2300A/B | 30A | 250/125V | 1900 | | | ● |

