



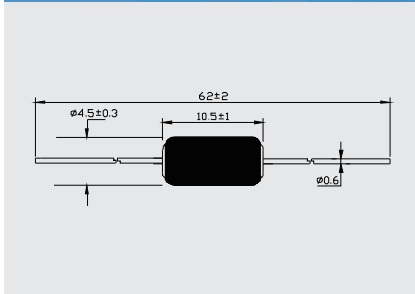

# TRC $\Phi 4.5 \times 10.5$ RoHS Compliant

## 热保护电阻

Thermal Fusible Resistor

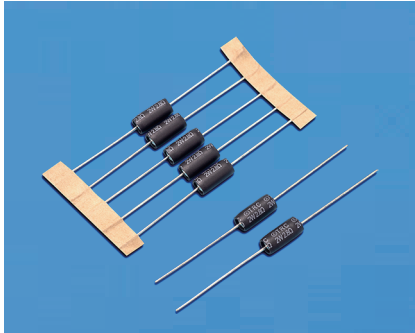

**测试标准:**

**Testing Standard:**

IEC60691 IEC-61000-4-5 IEC60127-8 UL1412

**工作温度:**

**Operating Temperature:**

-55°C ~ +125°C

**额定分断能力:**

**Interrupting Rating:**

300 Amperes at 250V AC

**材料:**

**Materials:**

End cap: sn plated iron

Tube: ceramic tube

Lead wire: tinned copper wire

Coat: EVA

**焊接方法:**

**Soldering Method:**

Wave soldering: 260°C, 5s max



Manual soldering: 350°C, 3s max

**包装:**

**Packaging:**

Automaton taped 1000PCS per inner, 10000PCS per carton

目录编号: Catalog No. 1:1W 2:2W B:3% C:5% D:10%

目录编号 Catalog No.	额定功率 Rated Power (W)	额定阻值 Rated Resistance ( $\Omega$ )	精度 Tolerance (%)	额定动作温度 Rated Functioning Temperature Tf ( $^{\circ}\text{C}$ )	认证 Approvals	
						
TRC0111/2C	1W/2W	1.1 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC0271/2C	1W/2W	2.7 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC0281/2C	1W/2W	2.8 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC0331/2C	1W/2W	3.3 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC0471/2C	1W/2W	4.7 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC0511/2C	1W/2W	5.1 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC0601/2C	1W/2W	6.0 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC1101/2C	1W/2W	10 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●
TRC1121/2C	1W/2W	12 $\Omega$	$\pm 5/\pm 10$	222 $^{\circ}\text{C}$	○	●

●表示已获认证  
○表示认证中