




2D Φ3x7 RoHS Compliant

超小型保险丝(快断型) Micro Fuse (Fast-Acting) 250V/125V

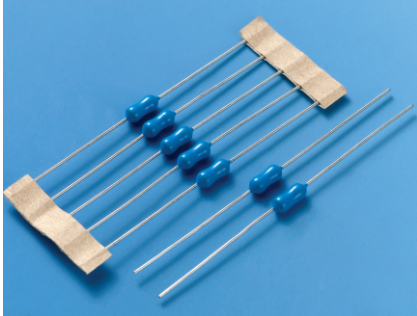

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

工作温度:


Operating Temperature:
-55°C ~ +125°C

材料:


Materials:
End cap: nickel plated brass
Ceramic tube: ceramic
Lead wire: tinned copper wire
Coat: epoxy resin

焊接方法:

Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

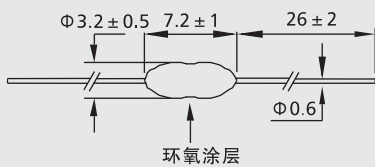

Time-Current Characteristics
电流-时间曲线图

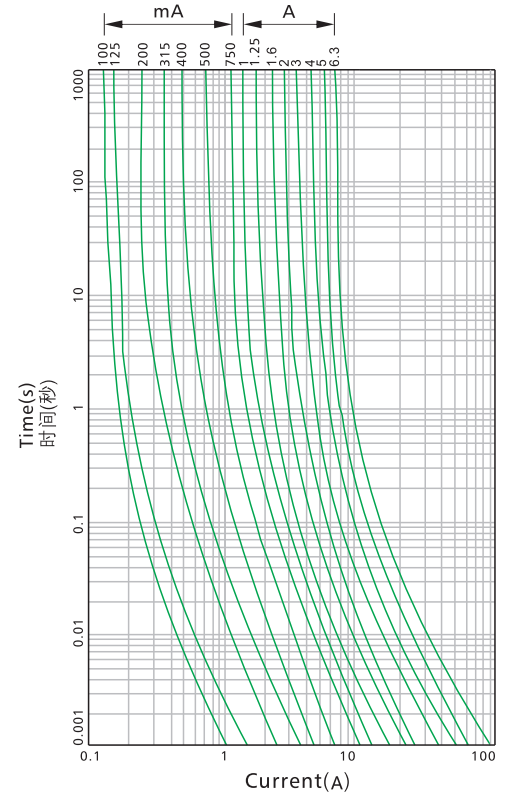

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	60 s Max (小于60秒)

目录编号: Catalog No.A:250V B:125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals		
						
2D0100A/B	100mA	250/125V	0.001	●	●	
2D0125A/B	125mA	250/125V	0.002	●	●	
2D0160A/B	160mA	250/125V	0.003	●	●	
2D0200A/B	200mA	250/125V	0.006	●	●	
2D0250A/B	250mA	250/125V	0.012	●	●	●
2D0300A/B	300mA	250/125V	0.016	●	●	●
2D0315A/B	315mA	250/125V	0.019	●	●	●
2D0350A/B	350mA	250/125V	0.022	●	●	●
2D0400A/B	400mA	250/125V	0.035	●	●	●
2D0500A/B	500mA	250/125V	0.047	●	●	●
2D0630A/B	630mA	250/125V	0.056	●	●	●
2D0750A/B	750mA	250/125V	0.078	●	●	●
2D0800A/B	800mA	250/125V	0.098	●	●	●
2D1100A/B	1A	250/125V	0.3	●	●	●
2D1125A/B	1.25A	250/125V	0.5	●	●	●
2D1150A/B	1.5A	250/125V	0.6	●	●	●
2D1160A/B	1.6A	250/125V	0.8	●	●	●
2D1200A/B	2A	250/125V	1.2	●	●	●
2D1250A/B	2.5A	250/125V	2.0	●	●	●
2D1300A/B	3A	250/125V	2.5	●	●	●
2D1315A/B	3.15A	250/125V	2.9	●	●	●
2D1350A/B	3.5A	250/125V	3.1	●	●	●
2D1400A/B	4A	250/125V	4.2	●	●	●
2D1500A/B	5A	250/125V	7.2	●	●	●
2D1630A/B	6.3A	250/125V	12	●	●	●

● 表示已获认证
● 表示认证中