


3E Φ 3.6x10 RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V



测试标准:
Testing Standard:
UL248-1 UL248-14


额定分断能力:
Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap: nickel plated brass
Glass tube: glass
Lead wire: tinned copper wire
Inner cap: nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
电流-时间曲线图

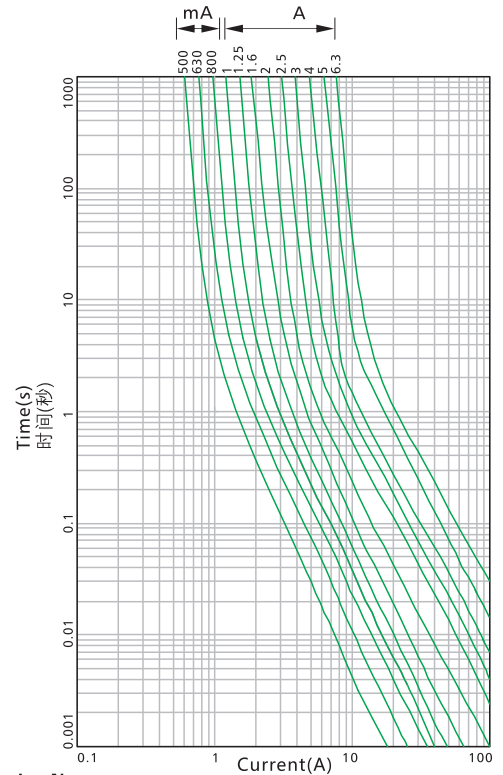

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	60 s Max (小于60秒)
1000%	10 ms Min (大于10毫秒)

目录编号: Catalog No. A:250V B:125V 带引线产品目录编号后加"P": Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals	
3E0100A/BP	100mA	250/125V	0.0042	●	●
3E0125A/BP	125mA	250/125V	0.010	●	●
3E0160A/BP	160mA	250/125V	0.025	●	●
3E0200A/BP	200mA	250/125V	0.035	●	●
3E0250A/BP	250mA	250/125V	0.056	●	●
3E0300A/BP	300mA	250/125V	0.10	●	●
3E0315A/BP	315mA	250/125V	0.12	●	●
3E0350A/BP	350mA	250/125V	0.15	●	●
3E0400A/BP	400mA	250/125V	0.25	●	●
3E0500A/BP	500mA	250/125V	0.35	●	●
3E0630A/BP	630mA	250/125V	0.55	●	●
3E0750A/BP	750mA	250/125V	0.70	●	●
3E0800A/BP	800mA	250/125V	1.1	●	●
3E1100A/BP	1A	250/125V	2.0	●	●
3E1125A/BP	1.25A	250/125V	3.8	●	●
3E1150A/BP	1.5A	250/125V	4.2	●	●
3E1160A/BP	1.6A	250/125V	6.2	●	●
3E1200A/BP	2A	250/125V	13	●	●
3E1250A/BP	2.5A	250/125V	18	●	●
3E1300A/BP	3A	250/125V	28	●	●
3E1315A/BP	3.15A	250/125V	32	●	●
3E1350A/BP	3.5A	250/125V	39	●	●
3E1400A/BP	4A	250/125V	43	●	●
3E1500A/BP	5A	250/125V	58	●	●
3E1630A/BP	6.3A	250/125V	81	●	●
3E1700A/BP	7A	250/125V	95	●	●
3E1800A/BP	8A	250/125V	119	●	●
3E2100A/BP	10A	250/125V	138	●	●
3E2120A/BP	12A	250/125V	157	●	●
3E2150A/BP	15A	250/125V	191	●	●

● 表示已获认证
● 表示认证中